




# How to Raleigh M20

By the end of this guide one should be able to replace old or broken bicycle pedals.

Written By: William Beechinor

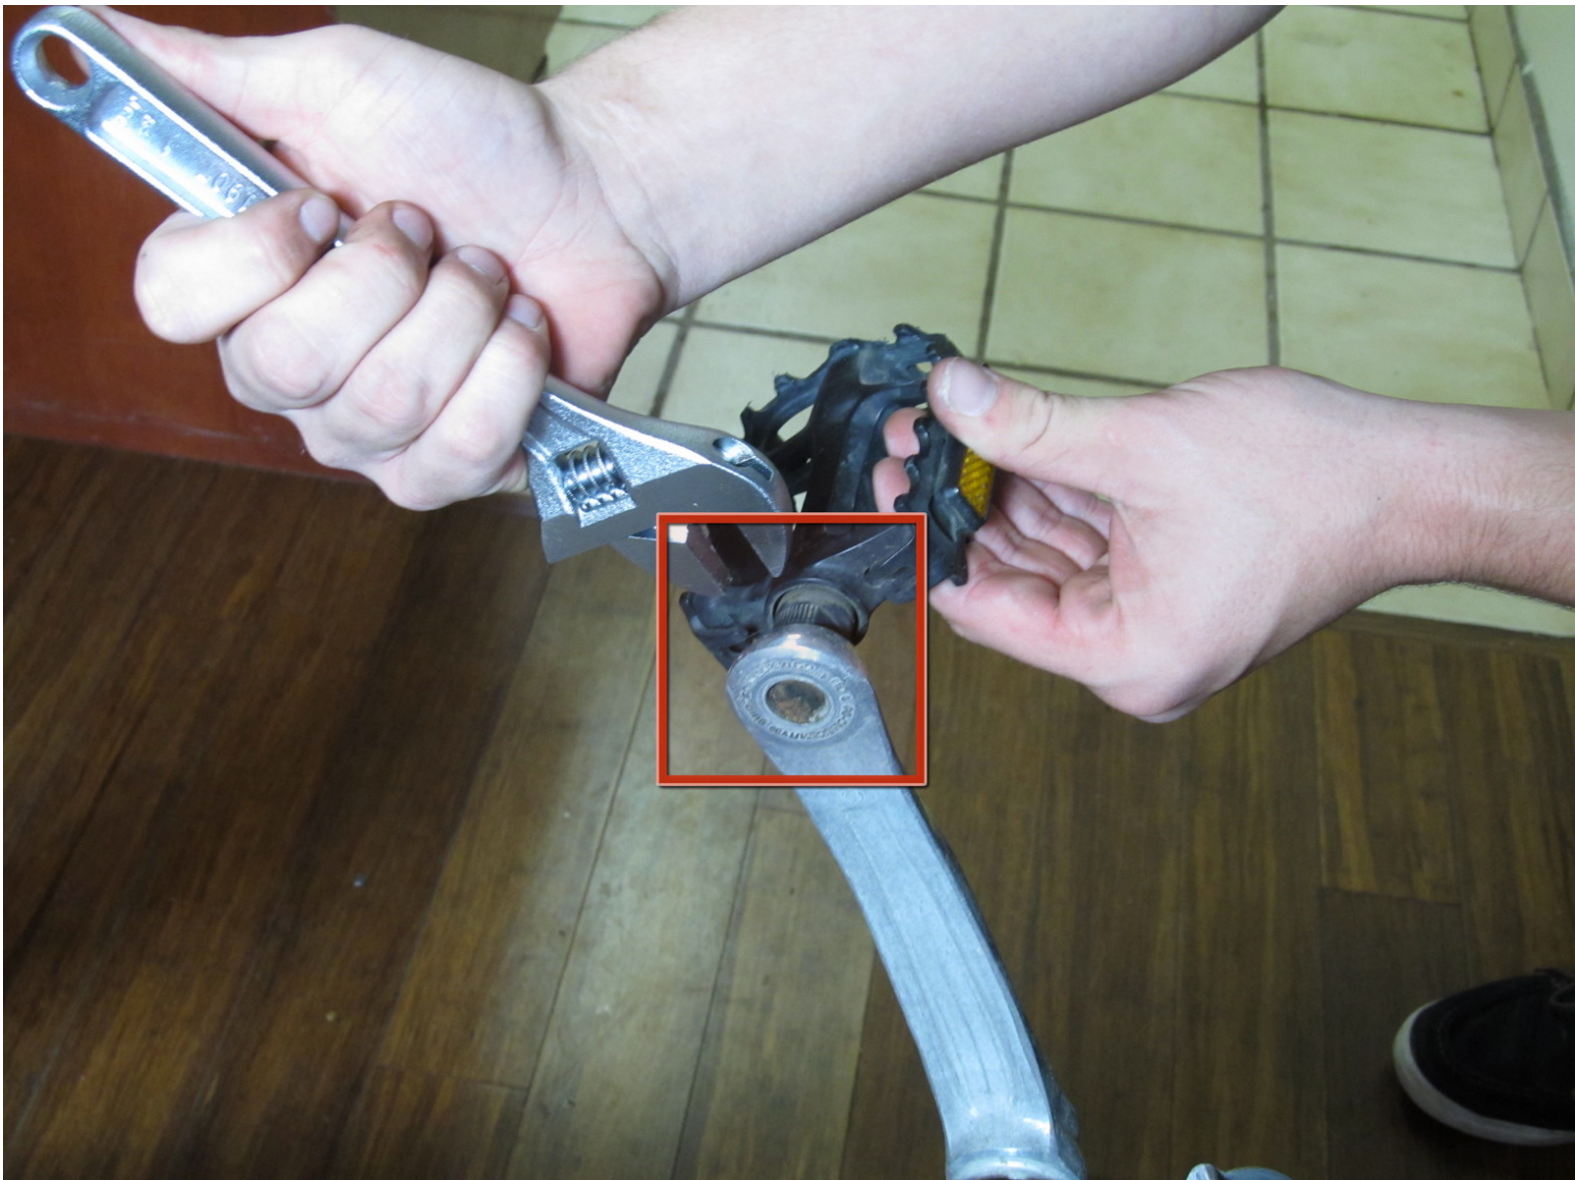

## INTRODUCTION

This guide will show you how to remove a broken or malfunctioning pedal and replace it with a new one.



### TOOLS:


- [Adjustable 8inch Crescent Wrench](#) (1)



### PARTS:


- [Pedal](#) (1)

## Step 1 — How to Raleigh M20

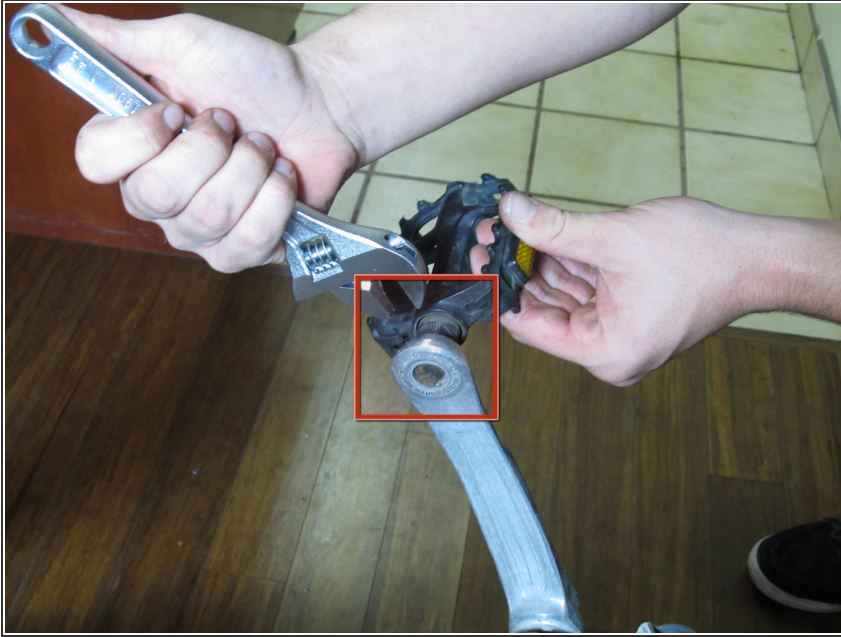

- First take an 8 in adjustable crescent wrench and fit it around the base of the pedal.

## Step 2

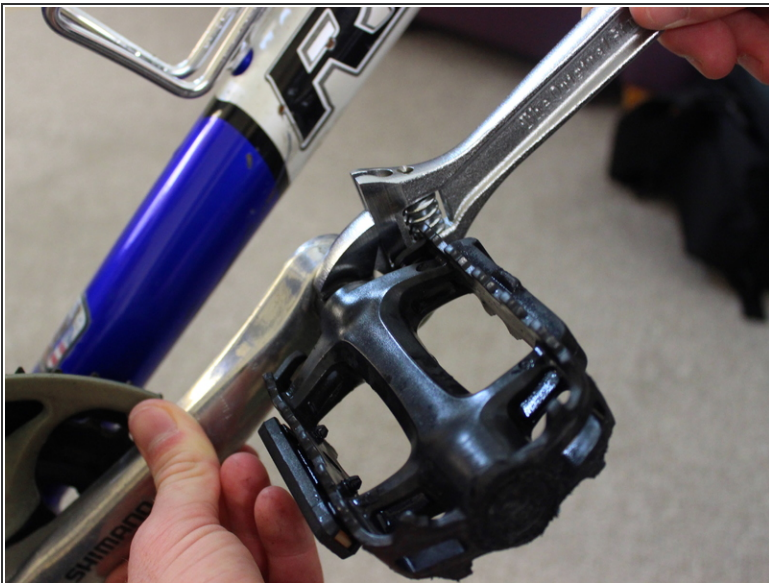

- To unscrew the chain side pedal twist the the wrench counter clockwise.
- To unscrew the pedal that is on the side away from the chain, twist the wrench clockwise.



## Step 3



- Continue turning the wrench until the pedal detaches from the crank arm.

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-11-07 07:43:28 PM.